


REPHASING TIE ROD HYDRAULIC CYLINDER - 3000PSI

- Honed tubing
- Inductin hardened piston rods
- SAE 8 PORTS
- 3,000 PSI working pressure
- 1" pin diameter
- Master cylinder provides powder for the entire system
- Painted per customer request

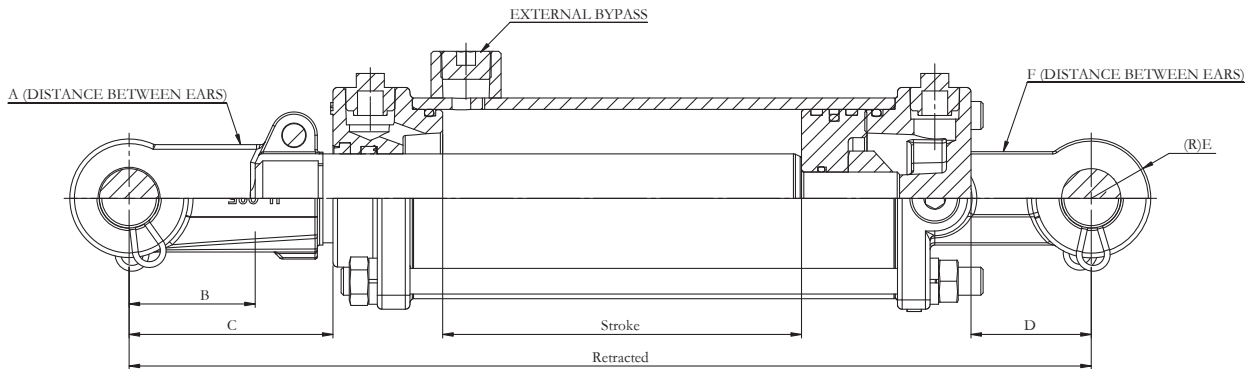

2" Bore Cylinder

Item No.	Bore	Stroke	Shaft	Retracted Length	Extended Length	Ports	Pin Dia	A	B	C	D	E	F	Weight
TR30300810	3"	8"	1.25"	20.25"	28.25"	SAE-8	1"	1.063"	1.813"	5.844"	1.875"	0.938"	1.063"	19.0 lbs
TR30320810	3.25"	8"	1.25"	20.25"	28.25"	SAE-8	1"	1.063"	1.813"	5.844"	1.875"	1.250"	1.063"	19.7 lbs
TR30321210	3.25"	12"	1.25"	24.25"	36.25"	SAE-8	1"	1.063"	1.813"	5.844"	1.875"	1.250"	1.063"	21.4 lbs
TR30350810	3.5"	8"	1.25"	20.25"	28.25"	SAE-8	1"	1.063"	1.813"	5.844"	1.875"	1.250"	1.063"	23.1 lbs
TR30351210	3.5"	12"	1.25"	24.25"	36.25"	SAE-8	1"	1.063"	1.813"	5.844"	1.875"	1.250"	1.063"	24.8 lbs
TR30370813	3.75"	8"	1.38"	20.25"	28.25"	SAE-8	1"	1.125"	1.875"	5.844"	1.750"	1.250"	1.063"	26.5 lbs
TR30371213	3.75"	12"	1.38"	24.25"	36.25"	SAE-8	1"	1.125"	1.875"	5.844"	1.750"	1.250"	1.063"	28.2 lbs
TR30400813	4"	8"	1.38"	20.25"	28.25"	SAE-8	1"	1.125"	1.875"	5.844"	1.750"	1.250"	1.063"	29.9 lbs
TR30401213	4"	12"	1.38"	24.25"	36.25"	SAE-8	1"	1.125"	1.875"	5.844"	1.750"	1.250"	1.063"	33.3 lbs
TR30450816	4.5"	8"	2.00"	20.25"	25.25"	SAE-8	1"	1.125"	1.875"	4.031"	1.750"	1.250"	1.125"	38.3 lbs
TR30451216	4.5"	12"	2.00"	24.25"	36.25"	SAE-8	1"	1.125"	1.875"	4.031"	1.750"	1.250"	1.125"	43.3 lbs
TR30470812	4.75"	8"	1.50"	20.25"	28.25"	SAE-8	1"	1.125"	1.813"	4.031"	1.750"	1.250"	1.125"	72.0 lbs
TR30471212	4.75"	12"	1.50"	24.25"	36.25"	SAE-8	1"	1.125"	1.813"	4.031"	1.750"	1.250"	1.125"	78.0 lbs
TR30501212	5"	12"	1.50"	24.25"	36.25"	SAE-8	1"	1.125"	1.813"	4.031"	1.750"	1.250"	1.125"	84.0 lbs